Anti Explosion/Corrosion Camera

Features

- Built-in 1/4" Sony Super HAD CCD
- 220X zoom (22x optical zoom and 10 digital zoom), f=3.9~85.8mm
- Pelco-D ,Pelco-P protocol, stainless steel made housing, Anti-Corrosion and Anti-explosion Capability
- Designed as Vandalproof and waterproof structure, delicate design, elegant appearance, widely used in high-end 24-7 surveillance like hotels, supermarkets, etc.
- Can also be applied on oil fields, sea surveillance, etc.
- Match with wall bracket.

Specifications

MODEL	CDR-1205
Signal System	PAL/NTSC
Image Sensor	1/4"SONY CCD
NO. of Effective Pixels	PAL:752(H)X582(V);NTSC:768(H)X494(V)
Horizontal Resolution	480 TV Lines
Minimum Illumination	0.05LUX/F1.2
S/N Ratio	52dB(AGC off)
Average Life	20000hrs
View Angle	60°
Lens	22x optical zoom,f=3.9-85.8mm
Control	RS-485
Electronic Shutter	PAL:1/50~1/100,000 NTSC1/60~1/100,000
Vandalproof criterion	IP65
Video Output	Composite Video Output(1Vp-p 75ΩTerminated)
Power Supply	DC 12V / AC24V
Protocol	Pelco-D,Pelco-P
Body	Chrome
Weight	TBD

Dimensions

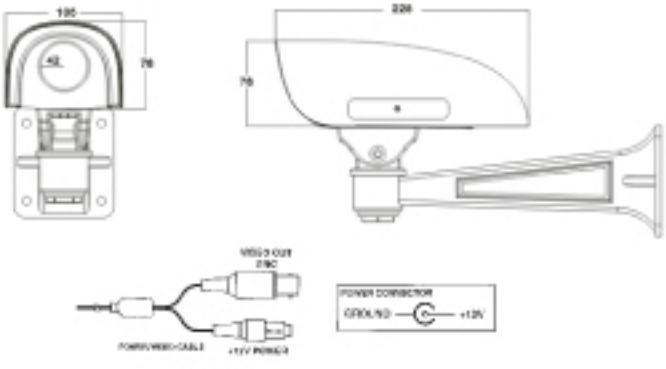

SVA Group USA Inc.
1316 John Reed Court, City of Industry, CA 91745
Tel: 626-363-9500 | Fax: 626-363-9508
1-888-8-ASK-SVA
http://www.sva-usa.com